INSTALLATION INSTRUCTIONS

Accessory	Application	Publications No.
LEATHER SHIFT KNOB P/N 08U92-S84-100	**1999 ACCORD (A/T) 2- AND 4-DOOR**	**All 20010**
		Issue Date **SEP 1998**

PARTS LIST

Leather shift knob

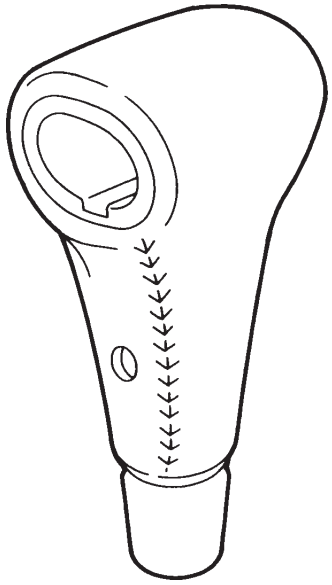

TOOLS REQUIRED

Phillips screwdriver

INSTALLATION

1. Remove the shift knob (two screws).

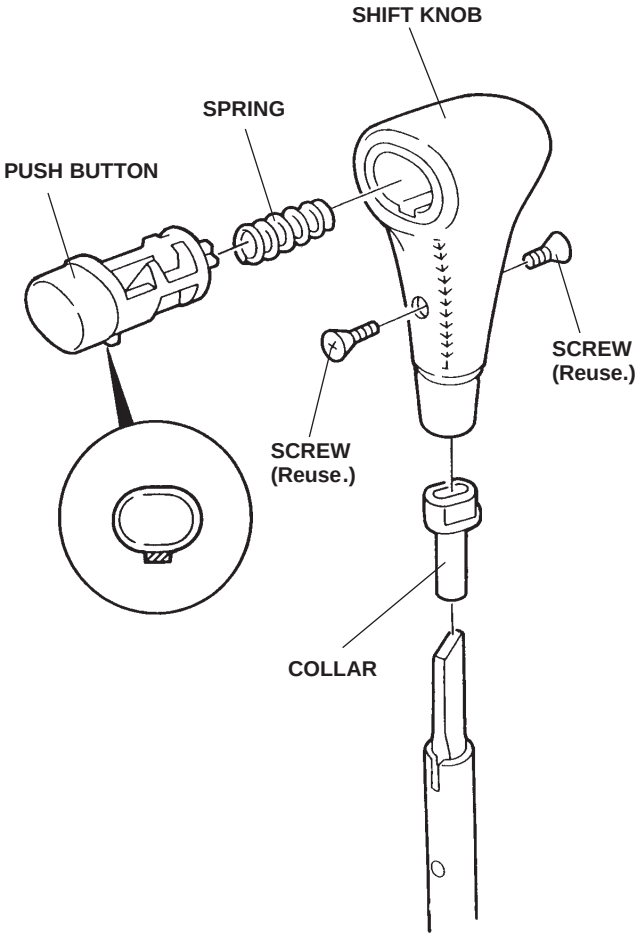

2. Transfer the push button and spring to the new leather shift knob, and make sure the collar is on the shift shaft; then install the new shift knob using the two screws you removed. You may feel a little resistance on the screws because thread lock was applied to their threads. Check that the push button works properly.

Use and Care

- Use a sponge or cloth and a solution of mild liquid dishwashing soap and water to clean the knob.
- Rinse the knob completely with water, then dry it with a shop towel.
- Never use organic solvents such as benzine, thinner, or gasoline to clean the shift knob.

1998 American Honda Motor Co., Inc - All Rights Reserved.